BH Drywall Metro Detroit

DRYWALL REPAIR · TAPING · FINISHING

(313) 236-4558 info@bhdrywallmetrodetroit.com bhdrywallmetrodetroit.com

ESTIMATE

Quote # **Q-20261104-PV6422**
Date **November 4, 2026**
Valid until **December 4, 2026**

PREPARED FOR
Mike
(313) 474-7777

PROJECT ADDRESS
6422 Plainview Ave
Detroit, MI

ESTIMATED DURATION
Approx. 2 weeks
Basement through upper floor

PROJECT SUMMARY

Whole-house drywall correction and finishing — basement, stairwells, main floor and upper floor. We will repair and re-hang drywall wherever there are major flaws (open or mismatched seams, gaps, loose or damaged sheets, stairwell walls, corners and edges), install or repair corner bead where needed, then fully tape, apply a 3-coat mud finish and sand all walls and ceilings in the scope so the home is smooth and **ready for paint**.

SCOPE & PRICING

#	DESCRIPTION	AMOUNT
1	**Site prep & protection** Cover floors and stair treads, plastic sheeting at openings, mask outlets, panels and fixtures.	$350.00
2	**Drywall repair & re-hang at major flaws** Replace loose/damaged sheets; fix open or mismatched seams and gaps; stairwell walls, corners and edges.	$1,650.00
3	**Corner bead — install & repair** New or repaired bead at outside corners, stairwell edges and openings where needed.	$450.00
4	**Taping** Tape and bed all seams, butt joints and inside corners on walls and ceilings.	$1,100.00
5	**Mudding / finishing coats (3-coat)** Fill and finish coats over joints, fasteners and bead, feathered for a flat, paint-ready surface.	$1,450.00
6	**Sanding & touch-up** Sand all finished areas smooth, inspect under light and touch up before final sign-off.	$550.00
7	**Materials** Drywall sheets, joint compound, paper and mesh tape, corner bead, screws and fasteners.	$750.00
8	**Debris removal & final cleanup** Daily tidy-up, haul-off of drywall scrap and dust cleanup at completion.	$200.00

TOTAL $6,500.00

Fixed price for the scope described. Labor, materials and cleanup included.

PROJECT TIMELINE

Estimated duration: **approx. 2 weeks**

DAYS 1–2
Prep & re-hang
Protect site, cut out and re-hang drywall at major flaws.

DAYS 3–4
Bead & tape
Install/repair corner bead, tape all seams and corners.

DAYS 5–8
3-coat finish
Fill and finish coats with drying time between each.

DAYS 9–10
Sand & walkthrough
Sand, touch up, clean up and final walkthrough.


CURRENT SITE CONDITIONS



Basement stairwell
Open seams and exposed corner bead



Stairwell entry corner
Mismatched seam, gap, raw bead

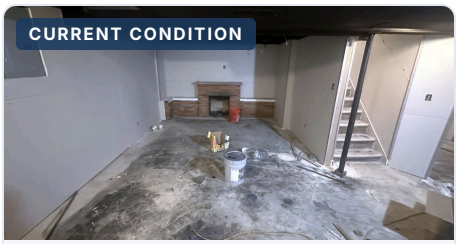


Basement main room
Untaped seams and corners throughout



Basement laundry area
Hung board, not yet taped



Main floor bedroom
Failed ceiling tape and open edges

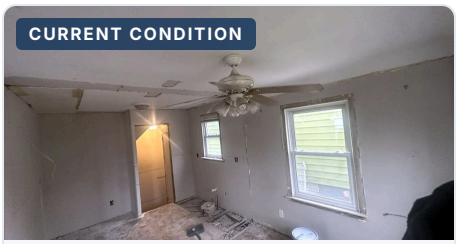

Main floor room
Open ceiling and wall seams

WHAT'S INCLUDED

- Repair / re-hang at major flaws: open seams, gaps, loose or damaged sheets
- Stairwell walls, corners and edges corrected and finished
- New or repaired corner bead wherever needed
- Tape on all seams, butt joints and inside corners
- Full 3-coat mud finish on walls and ceilings in scope
- Sanding to a smooth, paint-ready surface
- All materials, site protection, daily tidy-up and final cleanup
- Final walkthrough with the client

PAYMENT SCHEDULE

Deposit to schedule (50%)	**$3,250.00**
Balance on completion (50%)	**$3,250.00**
Total	**$6,500.00**

NOT INCLUDED UNLESS STATED

- Priming and painting
- Trim, baseboard and door work
- Electrical, plumbing or framing repairs

TERMS

1. **Payment.** 50% deposit ($3,250.00) to schedule; balance ($3,250.00) due on completion and final walkthrough.
2. **Hidden damage.** Damage found behind walls or ceilings (water, mold, framing, electrical, plumbing) is quoted separately before work continues.
3. **Painting.** Walls and ceilings are left ready for paint. Priming and painting are not included unless stated in writing.
4. **Changes.** Extra work is priced and approved in writing first. Timeline may vary with drying conditions.
5. **Site access.** Client provides access to the work areas and working electricity during the project.
6. **Validity.** Valid for 30 days from the estimate date (through December 4, 2026).

CLIENT ACCEPTANCE

Estimate Q-20261104-PV6422 · Total **$6,500.00**

By signing below, I accept this estimate, the scope of work and the terms above, and authorize BH Drywall Metro Detroit to schedule the work.

CLIENT SIGNATURE _____ PRINTED NAME _____ DATE _____

Thank you for the opportunity, Mike. Questions? Call **(313) 236-4558**.