BH Drywall

METRO DETROIT

(313) 236-4558 · info@bhdrywallmetrodetroit.com
bhdrywallmetrodetroit.com

ESTIMATE

Quote No. Q-20261104-DCP850
Estimate Date November 4, 2026
Valid Until December 4, 2026

PREPARED FOR

Matthew Bowman
Discovery Creative Pathways
(248) 762-9712
matthew.bowman@dcpschools.org

PROJECT LOCATION

Discovery Creative Pathways Harper Woods
19360 Harper Ave
Harper Woods, MI 48225
School classroom ceiling · approx. 850 sq ft

PROJECT SUMMARY

Restoration of the suspended (drop) acoustical ceiling in an approx. 850 sq ft classroom at Discovery Creative Pathways Harper Woods. The existing tiles have been removed and the remaining grid is uneven, misaligned and partly damaged. We will repair and level the grid, install new acoustical tile throughout with clean openings at every light and penetration, and tie the new work into the surrounding ceiling for one uniform finish.

SCOPE OF WORK

01 Grid Inspection & Component Repair
Inspect the existing suspended grid (main runners, cross tees, wall angle/molding and hanger wires) and repair or replace damaged or missing components wherever needed.

02 Grid Realignment, Squaring & Leveling
Re-hang, realign and square the grid to a consistent module layout, and level it to a true, flat plane. Re-tension existing hanger wires and add new hanger wires as required for proper support and spacing.

03 New Acoustical Ceiling Tile
Supply and install new acoustical ceiling tiles throughout the approx. 850 sq ft classroom area, fully seated in the grid with uniform, tight-fitting joints.

04 Precision Cutting at Fixtures & Penetrations
Field-cut and fit tiles around light fixtures, projector mounts, sprinkler heads, HVAC vents and other ceiling penetrations. Light openings are cleanly cut and properly sized for a neat, finished fit.

05 Seamless Tie-In to Existing Ceiling
Match grid lines, elevation and tile layout at all transitions so the new work ties in with the rest of the existing ceiling and reads as one continuous, consistent finish.

06 Site Protection, Debris Removal & Cleanup
Protect floors, furnishings and classroom contents during the work, remove all debris and packaging from the site, and leave the area clean and ready for classroom use.

INVESTMENT

DESCRIPTION	AMOUNT
Classroom Suspended Acoustical Ceiling — Complete Scope Scope items 01–06 above · approx. 850 sq ft · lump-sum price	$10,500.00

TOTAL ESTIMATE
All labor and materials included

$10,500.00

WHAT'S INCLUDED

- All labor, supervision and materials
- Grid repair and replacement components as needed
- New hanger wire and fasteners as required
- New acoustical tile throughout approx. 850 sq ft
- Clean, properly sized openings for all light fixtures
- Precise cuts at sprinkler heads, vents and mounts
- Seamless tie-in with the existing ceiling
- Site protection, debris removal and final cleanup


Not Included Unless Stated

Electrical work, light fixture replacement, fire-sprinkler modifications and any work outside the approx. 850 sq ft classroom area are not included in this estimate unless specifically stated. Tiles will be cut and fitted around existing fixtures and sprinkler heads without altering them.


SITE PHOTOS — EXISTING CONDITIONS



01 Existing grid – tiles removed

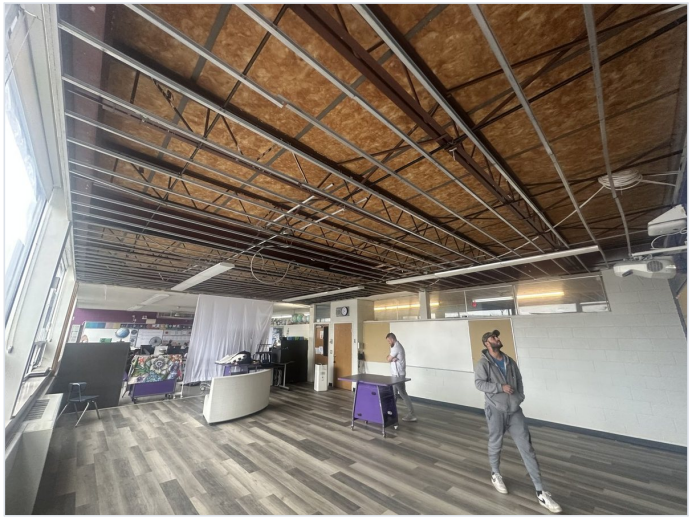

02 Classroom ceiling overview

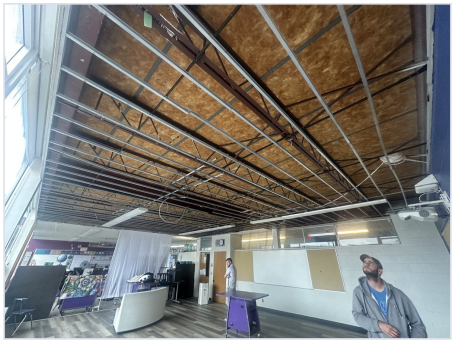

03 Uneven, out-of-level grid



04 Misaligned runners and cross tees



05 Damaged tee at perimeter wall angle

TERMS

01	**Payment**	A deposit is due to reserve the project on our schedule. The remaining balance is due upon completion of the work.
02	**Hidden Conditions**	Any concealed or hidden conditions discovered above the ceiling once work begins will be reviewed with the client and quoted separately before any additional work proceeds.
03	**Scheduling**	Work will be scheduled around school hours and activities as needed, in coordination with school administration.
04	**Validity**	This estimate is valid for 30 days from the estimate date (through December 4, 2026).

CLIENT ACCEPTANCE

By signing below, the client accepts this estimate, including the scope of work, price and terms described above, and authorizes BH Drywall Metro Detroit to schedule and proceed with the work.

Accepted amount: **$10,500.00** · All labor and materials included

CLIENT SIGNATURE _____ DATE _____

PRINTED NAME _____ TITLE _____

Thank you for the opportunity to work with Discovery Creative Pathways. Questions? Call (313) 236-4558 or email info@bhdrywallmetrodetroit.com.